



The Mulching Specialists


The Bull **C600**



MULCHING
is the **ECOLOGICAL SOLUTION**

The Bull **C600**

The C600 is the most powerful machine of our product line. Unique in the mulching industry with its elevated sprocket design, The Bull easily out paces the competition. It is the ideal machine for site preparation as well as agricultural and land development. Mulching tree roots and stumps comes easily to this machine.

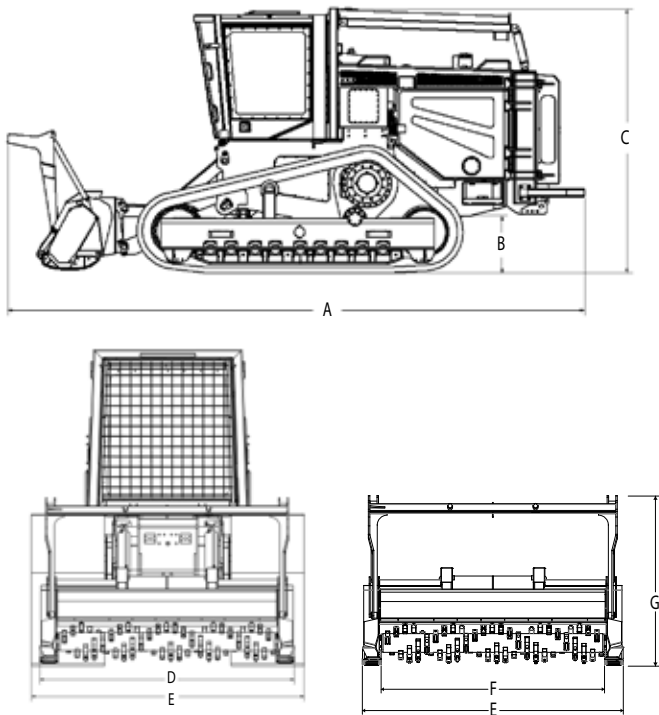

MACHINE

- A - Overall Length:** 289 inches (734 cm)
- B - Ground Clearance:** 17 inches (43 cm)
- C - Overall Height:** 132 inches (335 cm)
- D - Overall Tractor Width:** 110 inches (279 cm)
- MULCHER** (500-U250, Hydraulic Tilt)
- E - Overall Width Attachment:** 120 inches (305 cm)
- F - Working Width:** 98 inches (249 cm)
- G - Overall Height** (pushbar fully retracted): 76 inches (193 cm)

Specifications

ENGINE

- Manufacturer & Model:** John Deere, 6135 HF
- Non-Road Emission Standard:** EPA Tier 3
- Cylinders/Displacement:** 6 cylinder/824 cu. In (13.5 L)
- SAE Net Rated Power at 2,500 rpm:** 600 Hp (441 Kw)
- Net Peak Torque @ 1,400 rpm:** 1881 Lbs,-Ft. (2550 Nm)
- Air Cleaner:** Precleaner & 2 stage air cleaner, dry type
- Fan:** Automatic variable pitch reversible fan

HYDRAULICS

- Number of pumps:** 5
- Attachment:** Two piston pumps
- Track:** Two piston pumps
- Auxiliary function:** One tandem gear pump
- Filtration:** 10 micron screens on charge pumps.
25 micron screens on all other pumps and motors

ELECTRICAL

- Voltage:** 12 volts
- Battery Capacity:** 950 CCA
- Alternator:** 140 Ah
- Standard Light:** 8 Halogen type (4 Front, 2 Side, 2 Rear)

UNDERCARRIAGE & GROUND PRESSURE

- Chain Type & Size:** Sealed and Lubricated, D6H Caterpillar with an elevated final drive design
- Rollers, Bottom:** 9 (D6H Caterpillar) single and double flange tractor type
- Roller, Upper:** 1 (D6H Caterpillar) single flange roller
- Track Shoe:** 30 in (760 mm) single grouser pad with mud hole
- Ground Pressure with Mulcher Head:** 8.0 Psi (0.56 kg/cm²)
- Ground Pressure Crawler Tractor only:** 6.7 Psi (0.47 kg/cm²)
- Weight (Crawler & Mulcher):** 60,000 lbs (27,215 kg)
- Weight (Crawler only):** 50,100 lbs (22,725 kg)

SERVICEABILITY

- Fuel Tank:** 238 gal. (900 L)
- Hydraulic Reservoir:** 175 gal. (660 L)
- Cooling System:** 13.7 gal. (52 L)

WINCH

Not available

TOP SPEED

- Motor:** Two speed hydraulic motors
- Speed:** Variable speed from 0 to 5.0 mph (0 to 8.0 km/h)

C.M.I. reserves the right to change specifications, design and price of products described in this literature without notice. C.M.I. and The Bull C600 are registered trademarks of C.M.I. Danri inc. Printed in Canada.