



The Mulching Specialists


Hurricane **C300**



MULCHING
is the **ECOLOGICAL SOLUTION**

Hurricane **C300**

The all new C300 Hurricane is the improved version of the C250; World's best in class for high mulching performance in very soft soil and steep hills. With the lowest ground pressure, it will work easily in wetland restoration, right-of-way clearing, agricultural and land preparation with minimal footprints.

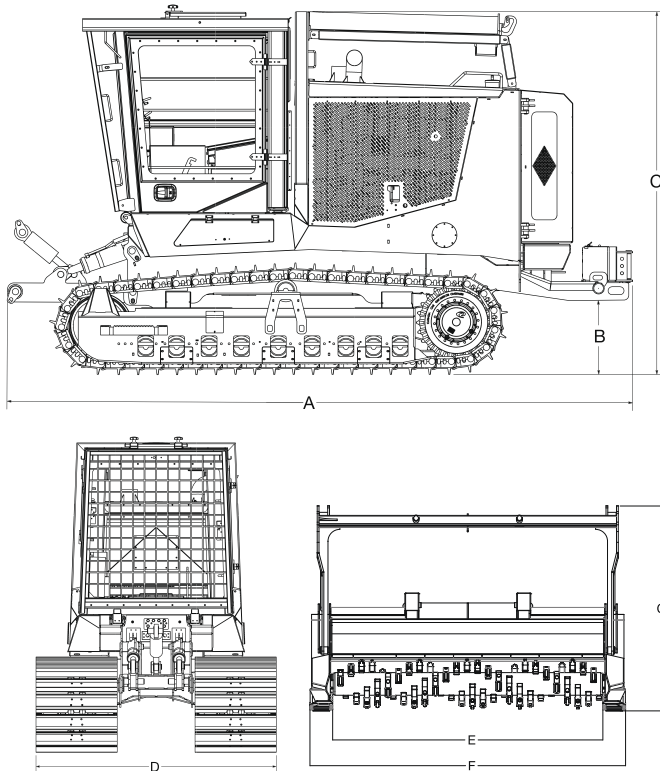

MACHINE

A - Overall Length: 197 inches (500 cm)

B - Ground Clearance: 19 inches (48 cm)

C - Overall Height: 116 inches (295 cm)

D - Overall Tractor Width: 89 inches (226 cm)

MULCHER (200 U 225, Hydraulic Tilt)

E - Overall Width Attachment: 107 inches (272 cm)

F - Working Width: 89 inches (226 cm)

G - Overall Height (pushbar fully retracted): 64 inches (162 cm)

Specifications

ENGINE

Manufacturer & Model: CUMMINS, QSL 9 Tier 4

Cylinders/Displacement: 6 cylinders/543 cu. In (8.9 L)

SAE Net Rated Power at 2,000 rpm: 290 Hp (205 Kw)

Net Peak Torque @ 1,500 rpm: 895 lbs/Ft. (1,213 Nm)

Air Cleaner: Precleaner & 2 stage air cleaner, dry type

Fan: Automatic variable pitch, reversible

HYDRAULICS

Pump System: 4

Attachment: One piston pump

Track: Two piston pumps

Auxiliary function: One gear pump

Filtration: 10 micron screens on charge pumps.

25 micron screens on all other pumps and motors

ELECTRICAL

Voltage: 12 volt

Battery Capacity: 950 CCA

Alternator: 130 amp

Standard Light: 8 LED type (4 Front, 2 Side, 2 Rear)

UNDERCARRIAGE & GROUND PRESSURE

Chain Type & Size: Dry, D3

Rollers, Lower: 9 single and double flange tractor type

Roller, Upper: 1 (D3 type) single flange

Track Shoe: 30 in. (760 mm) single grouser with mud hole

Ground Pressure with Mulcher: 3.83 Psi (0.21 kg/cm²)

Ground Pressure Crawler Tractor only: 2.98 Psi (0.14 kg/cm²)

Total Weight (Crawler & Mulcher): 28,840 lbs (13,110 kg)

Weight (Crawler only): 22,450 lbs (10,205 kg)

SERVICEABILITY

Fuel Tank: 105 US gal. (394 L)

Hydraulic Reservoir: 43 gal. (163 L)

Cooling System: 12 gal. (45 L)

WINCH

Standard: 15,000 lbs (6,800 kg)

TOP SPEED

Motor: Two speed hydraulic motors

Speed: Variable speed 0 to 3.4 mph (0 to 5.5 km/h)

C.M.I. reserves the right to change specifications, design and price of products described in this literature without notice. C.M.I. and Hurricane C300 are registered trademarks of C.M.I. Danri inc. Printed in Canada.